CORDLESS TOOLS
INDUSTRIAL

ISO 9001
Certificate TW04/02301

INNOVATIVE BRUSHLESS MOTOR ASSURE
THE BEST AND RELIABLE QUALITY

SUMAKE®

MAKE JOBS BETTER THAN EVER

CE

SUMAKE COMPANY PROFILE

Sumake is a manufacturer and exporter specializing in professional high quality pneumatic tools, compressors and accessories suited to a wide range of applications including industrial and automotive.

We are an innovative company.

As a result of constant research and investment we keep at the forefront of current technology and design, thus providing energy efficient, durable and reliable products to industrial markets around the world.
We offer a wide, comprehensive range of CE certified tools and accessories including: Brushless Electric Screwdrivers, Transducerized DC Tools, Torque Readout and Screw Counting System, just to name a few.
Certified to ISO 9001 we run efficient well organized computerised Q.C. ensure we meet quality, packaging and delivery benchmarks.
We guarantee our customers complete spare parts back up for everything we provide.

Superior service to our customers is not a goal, it's a reality.

Sumake, partners in business.

SUMAKE has attended many international exhibitions and is known for a variety of high-end innovations with vivid posters.
Our outstanding showcase is not only eye-catching but also provides hands-on experience for visitors.

INDEX

PISTOL TYPE — 10.8V FULL AUTO SHUT-OFF CORDLESS SCREWDRIVER P1



STRAIGHT TYPE — 7.2V & 10.8V FULL AUTO SHUT-OFF CORDLESS SCREWDRIVER P2 ~ 3

SHUT-OFF — 18V FULL AUTO SHUT-OFF CORDLESS ANGLE WRENCH P4 ~ 5

SHUT-OFF & SEMI AUTO — 18V BRUSHLESS FULL AUTO SHUT-OFF & SEMI-AUTO SCREWDRIVER P6 ~ 7

MECHANICAL PULSE — 14.4V REMOTE CONTROL TYPE SCREWDRIVER / WRENCH P8

BATTERY & CHARGER — LITHIUM ION BATTERY & CHARGER P9

10.8V BRUSHLESS FULL AUTO SHUT-OFF CORDLESS SCREWDRIVER

NEW

Features :

BRUSHLESS MOTOR GUARANTEE 2 years

1. **High Accuracy Assurance:** ±3% deviation of torque, assure the best quality.
2. **Ideal for limited space or areas** where cables and hoses impede handing flexibility e.g., car interior electrical, car assembly, factory assembly etc.
3. **High mobility and lightweight ergonomic design,** easy to carry and operate.
4. **Dormancy Mode:** Once the screwdriver idles for over 5 seconds, if will turn to sleep mode to save the energy and increase the standby time. The power will be cut off when idle time exceeds 24 seconds, press the trigger to restore power.

Torque Fixed Ring
Fixed ring design could prevent user from adjusting the torque at will.

Maintenance-free silent brushless motor

Indicating LED
built-in indicator light to indicate tightening procedure during operation.

Waist Hook
The waist hook allows the user to hang the device on the work belt and carry it easily.

See The Movie on cell phone!

Single-Hand Operation
Push to change the rotary direction easily.

Ergonomic handle design with TPE rubber grip

PCB Control
1.Low battery protection
2.Temperature protection
3.Current protection

Battery
10.8V 3.0Ah Lithium-ion battery

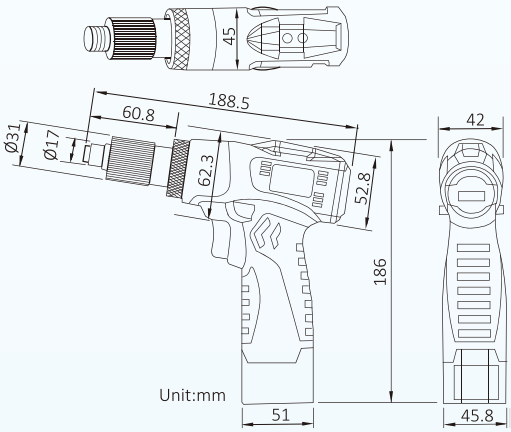

EAA-TL28A
Torque Cover

Torque Curve

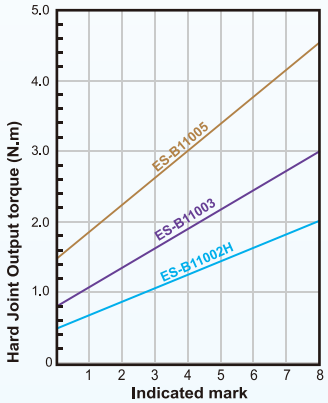

Specification:

Model No.	Voltage (V)	Free Speed (r.p.m)		Torque Range (±3%)			Weight (w/o Battery)		Dimension L x H (mm) (w/o Battery)	Battery Pack	Bit Type
		High	Low	ft-lbs (Hard Joint / Soft Joint)	N.m (Hard Joint / Soft Joint)	kgf/cm (Hard Joint / Soft Joint)	lbs	kg			
ES-B11002HA/E-30	10.8	2700	1900	0.37 - 1.48 0.37 - 1.18	0.5 - 2.0 0.5 - 1.6	5 - 20 5 - 16	1.54	0.7	189 x 157	BP1030L x 2 pcs	B Standard: HEX 6.35mm
ES-B11003A/E-30	10.8	1400	1000	0.59 - 2.21 0.59 - 1.77	0.8 - 3.0 0.8 - 2.4	8 - 30 8 - 24	1.54	0.7	189 x 157	BP1030L x 2 pcs	E Option: HEX 5mm
ES-B11005A/E-30	10.8	800	550	1.11 - 3.32 1.11 - 2.66	1.5 - 4.5 1.5 - 3.6	15 - 45 15 - 36	1.54	0.7	189 x 157	BP1030L x 2 pcs	F HEX 6.35mm

*Standard tool with ESD housing & 2 batteries.

7.2V BRUSHLESS FULL AUTO SHUT-OFF CORDLESS SCREWDRIVER

NEW

Features :

1. **High Accuracy Assurance:** ±3% deviation of torque, assure the best quality.
2. **Ideal for limited space or areas** where cables and hoses impede handing flexibility.
3. **High mobility and lightweight ergonomic design,** easy to carry and operate.
4. **Dormancy Mode:** Once the screwdriver idles for over 5 seconds, if will turn to sleep mode to save the energy and increase the standby time. The power will be cut off when idle time exceeds 24 seconds, press the trigger to restore power.

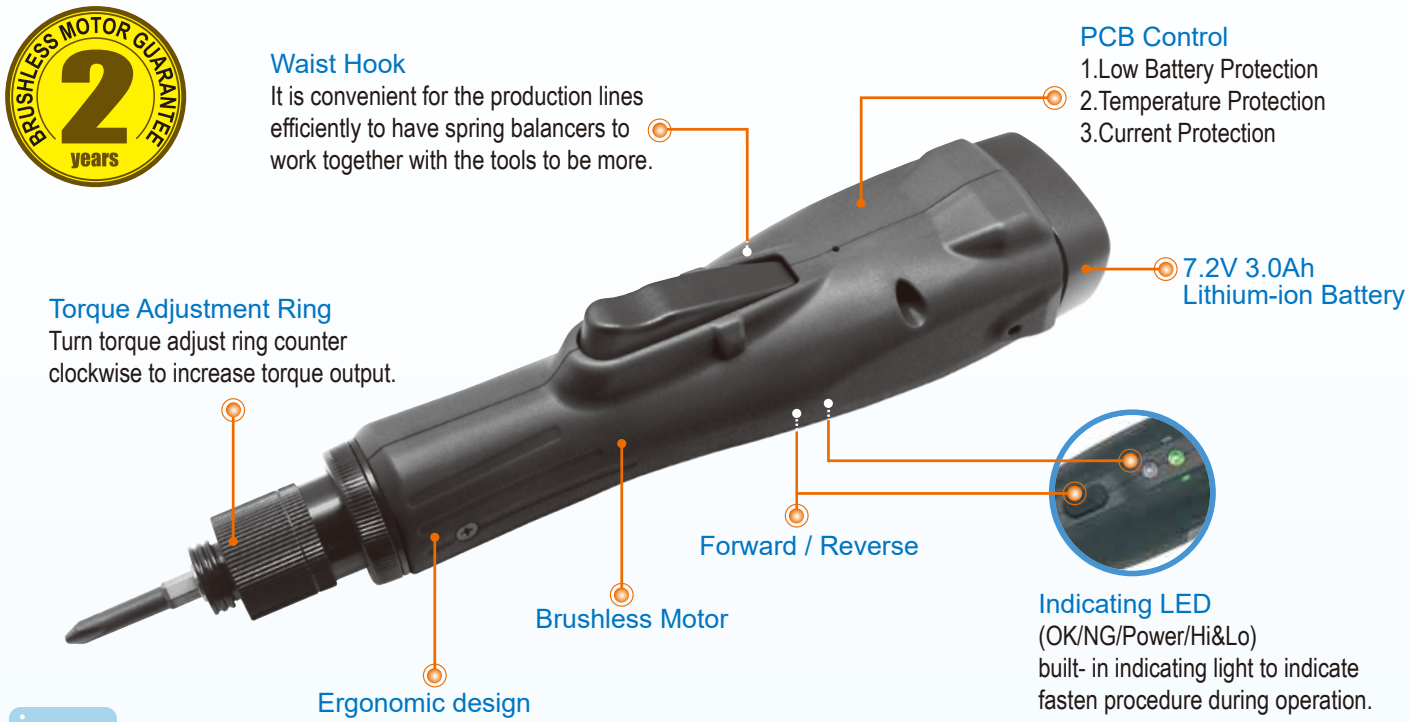

See The Movie on cell phone!

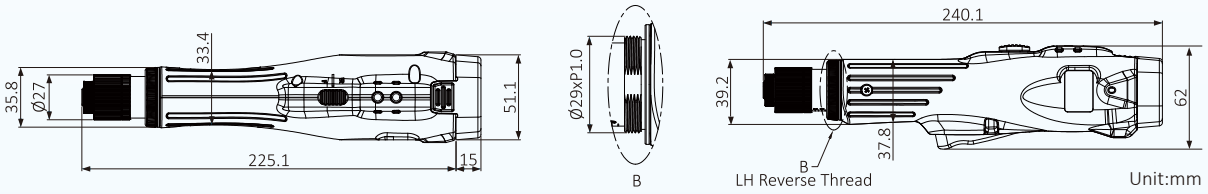

Specification:

Model No.	Voltage (V)	Free Speed (r.p.m)		Torque Range(±3%)			Weight (w/o Battery)		Dimension L x W (mm) (w/o Battery)	Battery Pack	Bit Type
		High	Low	ft-lbs (Hard Joint / Soft Joint)	N.m (Hard Joint / Soft Joint)	kgf/cm (Hard Joint / Soft Joint)	lbs	kg			
ES-BS0705A/E-30	7.2V	1000	700	0.07 - 0.37 0.07 - 0.3	0.1 - 0.5 0.1 - 0.4	1 - 5 1 - 4	1.17	0.53	225 x 62	BP0730L x 2 pcs	B HEX 6.35mm 9.5 6.35
ES-BS0712A/E-30	7.2V	1000	700	0.15 - 0.89 0.15 - 0.71	0.2 - 1.2 0.2 - 0.96	2 - 12.2 2 - 9.8	1.17	0.53	225 x 62	BP0730L x 2 pcs	
ES-BS0712LS1A/E-30	7.2V	500	350	0.15 - 0.89 0.15 - 0.71	0.2 - 1.2 0.2 - 0.96	2 - 12.2 2 - 9.8	1.17	0.53	225 x 62	BP0730L x 2 pcs	

*Standard tool with ESD housing & 2 batteries.

SUMAKE

10.8V BRUSHLESS FULL AUTO SHUT-OFF CORDLESS SCREWDRIVER

Features :

1. **High Accuracy Assurance:** 3% deviation of torque (Shut off type), assure the best quality.
2. **Economy:** Wide-ranging torque with longer life cycle of motor (2 years Motor guarantee for shut off type).
3. **Dormancy Mode (Power saving):** Once the screwdiver idles for over 3 second, it will turn to dormancy mode to save the energy and increase the standby time.

EAA-AH1S *(Option)*
90° Angle Head

EAA-TL28A
Torque cover

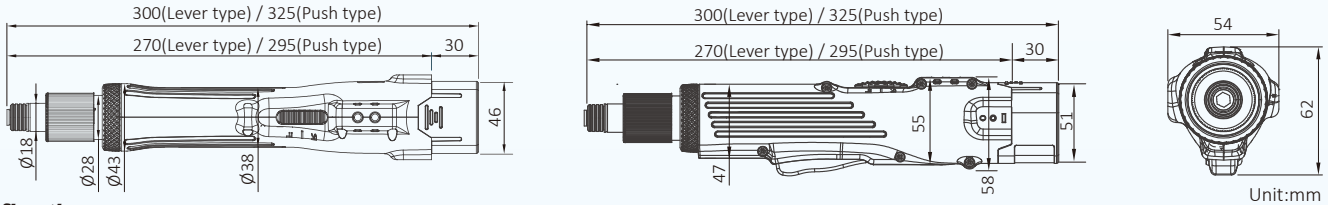

Unit:mm

Specification:

Model No.	Voltage (V)	Free Speed (r.p.m)		Torque Range(±3%) (Hard Toint / Soft Joint)			Weight (w/Battery)		Dimension (mm) w/o Battery	Battery Pack	Bit Type
		High	Low	ft-lbs	N.m	kgf/cm	kg	lbs			
Lever Start Type										BP1030L x 2 pcs	Standard: B HEX 6.35mm; Option: E HEX 5mm, F HEX 6.35mm
ES-BS1002A-30	10.8	1200	850	0.22 - 1.48 0.22 - 1.2	0.3 - 2.0 0.3 - 1.6	3.1 - 20 3.1 - 16.3	0.7	1.54	270 x 62		
ES-BS1003A-30	10.8	1200	850	0.59 - 2.21 0.59 - 1.8	0.8 - 3.0 0.8 - 2.4	8.2 - 31 8.2 - 24.5	0.7	1.54	270 x 62		
ES-BS1004A-30	10.8	700	500	1.11 - 3.33 1.11 - 2.7	1.5 - 4.5 1.5 - 3.6	15.3 - 46 15.3 - 36.7	0.7	1.54	270 x 62		
Push To Start Type											B HEX 6.35mm
NEW ES-BS1002PA-30	10.8	1200	-	0.4 - 1.48 0.4 - 1.2	0.5 - 2.0 0.5 - 1.6	5.1 - 20 5.1 - 16.3	0.72	1.59	295 x 62		
NEW ES-BS1003PA-30	10.8	1200	-	0.7 - 2.2 0.7 - 1.8	1.0 - 3.0 1.0 - 2.4	10.2 - 30.6 10.2 - 24.5	0.72	1.59	295 x 62		
NEW ES-BS1004PA-30	10.8	700	-	1.5 - 3.32 1.5 - 2.7	2.0 - 4.5 2.0 - 3.6	20.4 - 46 20.4 - 36.7	0.72	1.59	295 x 62		

*Standard tool with 2 batteries. *Optional: ESD housing available.

18V BRUSHLESS FULL AUTO SHUT-OFF CORDLESS ANGLE SCREWDRIVER & WRENCH

Colorful torque ring easily distinguish the torque virtually

Angle head can be adjusted through 360° by 45° turns in 8 equal positions

Friendly Design
LED light for working in dark area

Internal Torque Adjustment

Hanger Ring

Automatic shut-off clutch with high precision torque

High & Low Speed switch to extend the application

Brushless Motor (Environmental Friendly)

Power light
LED signal light

One-Hand operation
Easy to switch Forward/Reverse

PCB control protection

Waist Hook

The performance with fully charged battery can reach to 560 screws on loading 60 Nm (EAW-B1860-40)

Wrist Strap

18V BRUSHLESS FULL AUTO SHUT-OFF CORDLESS ANGLE SCREWDRIVER & WRENCH

Protection & safety:

1. Over electric current protection.
2. Slow rotation protection.
3. Reverse control protection.
4. Battery Self-identified & Sleep mode (Energy saved).
5. Low power protection.
6. Thermal protection.
7. Stall protection.

BRUSHLESS MOTOR GUARANTEE 2 years

Charger

- Identification Of Original Battery Device: identify whether the battery is original or not, if not, the battery can not be charged. (BC21L03)

BC21L02
Weight : 0.53kg
BC21L03
Weight : 0.55kg
21 Voltage Charger

BC21L04
21 Voltage Charger
Weight : 0.53kg

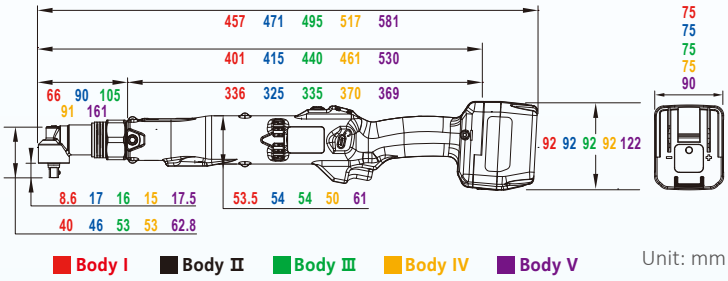

Unit: mm

Specification:

Model No.	Voltage (V)	Free Speed (r.p.m)	Torque Range (Accuracy±5%)			Weight (w/o Battery)		Dimension (WxLxH) (mm)	Battery Pack	Option Charger	Bit Type	
		High Low	in-lbs (Hard Joint Soft Joint)	Nm (Hard Joint Soft Joint)	Kgf/cm (Hard Joint Soft Joint)	lbs	kg				Standard	Option
Body I												
EAS-B1805H-20	18	1,200 800	17.7~44.3 17.7~35.4	2~5 2~4	20~50 20~40	2.76	1.25	75x457x92	BP1820L	BC21L04	B: HEX 6.35mm	E: HEX 5mm
EAS-B1807-20	18	850 550	22.1~62.0 22.1~49.6	2.5~7 2.5~5.6	25~70 25~56	2.76	1.25	75x457x92	BP1820L			
Body II												
EAS-B1812-20	18	550 350	53.1~106.2 53.1~85	6~12 6~9.6	60~120 60~96	3.31	1.5	75x471x92	BP1820L	BC21L04	B: HEX 6.35mm	W: Square Drive 3/8"
Body III												
EAS-B1815-20	18	350 220	70.8~132.8 70.8~106.2	8~15 8~12	80~150 80~120	4.08	1.85	75x495x92	BP1820L			
Body IV												
EAS-B1808H-20	18	1200 800	26.6~70.8 26.6~56.6	3~8 3~6.4	30~80 30~64	4.19	1.9	75x517x92	BP1822L	BC21L04	B: HEX 6.35mm	W: Square Drive 3/8"
EAS-B1815H-20	18	800 550	70.8~132.8 70.8~106.2	8~15 8~12	80~150 80~120	4.19	1.9	75x517x92	BP1822L			
EAW-B1830-20	18	420 270	106.2~265.5 106.2~212.4	12~30 12~24	120~300 120~240	4.19	1.9	75x517x92	BP1822L		W: Square Drive 3/8"	-
Body V												
EAW-B1845-40	18	200 130	132.8~398.3 132.8~318.6	15~45 15~36	150~450 150~360	6.27	2.85	90x581x122	BP1841L	BC21L02 BC21L03	W: Square Drive 1/2"	-
EAW-B1860-40	18	200 130	221.3~531 221.3~424.8	25~60 25~48	250~600 250~480	6.27	2.85	90x581x122	BP1841L			

*Free load speed will be fixed when battery volume is more than 17V (17~21V).

18V BRUSHLESS
FULL AUTO SHUT-OFF CORDLESS SCREWDRIVER

Features :

1. **High Accuracy Assurance:** 3% deviation of torque (Shut off type), assure the best quality.
2. **Economy:** Wide-ranging torque with longer life cycle of motor (2 years Motor guarantee for shut off type).
3. **Less Counterforce:** Special mechanical structure and motor improve the safety of operator and reduce occupational disease.
4. **Energy Saving:** With efficiency motor provide 8000 screws on loading 6Nm torque – ES-B1806-20 with fully charged battery.
5. **Dormancy Mode (Power saving):** Once the screwdiver is idle for over 3 seconds, it will enter sleep mode to save energy and increase standby time.

BRUSHLESS MOTOR GUARANTEE 2 years

Torque Fixed Ring
Fixed ring design could prevent user from adjust the torque at will.
*For Small body Ⅰ model no. EAA-TC16A
*For Small body Ⅱ model no. EAA-TC17A

External Torque Adjustment
Adjust torque rapidly from external torque ring

Friendly Design
LED light for working in dark area

Single-Hand Operation
Push to change the rotary direction easily.
Adjust forward/reverse lever to the center position to trigger, prevent tool from misapplied.

★ With efficient motor increase the productivity.
The performance of ES-B1806-20 with full charged battery can reach to 8,000 screws on loading 6Nm torque.

Waist Hook



High & Low Speed Adjustment
For extended use application

OK/NG Indication
The LED Green flash –
one short buzz means "OK - Shut Off "
The LED Red flash –
one Long buzz means "NG"

Low Cell Warning
20%: Flash Red Light - Pls change battery;
10%: Red light - Power cut off



PCB Control
- MOS Temperature Protection
- Anti-rotating Protection

Brushless Motor
Innovative Brushless motor design eliminated carbon dust pollution; result in low maintenance

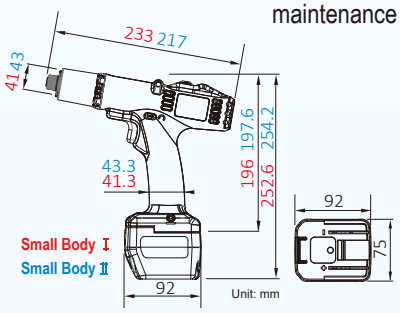

Specification:

Model No.	Voltage (V)	Free Speed (r.p.m)		Torque Range (±3%)			Weight (w/Battery)		Dimension (WxLxH) (mm)	Battery Pack	Bit Type
		High	Low	ft-lbs (Hard Joint / Soft Joint)	Nm (Hard Joint / Soft Joint)	Kgf/cm (Hard Joint / Soft Joint)	kg	lbs			
Small Body Ⅰ											
ES-B1803-20	18	1,000	650	0.74-2.59 0.74-2.10	1.0-3.5 1.0-2.8	10-35 10-28.6	1.34	2.93	75x217x252	BP1820L	
ES-B1803H-20		2,000	1,300	0.74-2.59 0.74-2.10	1.0-3.5 1.0-2.8	10-35 10-28.6	1.34	2.93	75x217x252		
ES-B1806-20		1,000	650	1.48-4.44 1.48-3.60	2.0-6.0 2.0-4.8	20-60 20-48.9	1.34	2.93	75x217x252	BP1820L	
Small Body Ⅱ											
ES-B1805H-20	18	2,200	1,400	1.48-3.69 1.48-3.0	2.0-5.0 2.0-4.0	20-50 20-40.8	1.48	3.25	75x233x254		
ES-B1809-20		1,000	650	2.22-6.66 2.22-5.3	3.0-9.0 3.0-7.2	30-90 30-73.4	1.48	3.25	75x233x254		
ES-B1812-20		880	570	4.44-8.88 4.44-7.10	6.0-12.0 6.0-9.6	60-120 60-97.9	1.48	3.25	75x233x254		

Model No. with "A" includes 2 batteries. e.g.ES-B1803A-20

SUMAKE

18V BRUSHLESS FULL AUTO SHUT-OFF & SEMI-AUTO CORDLESS SCREWDRIVER

BRUSHLESS MOTOR GUARANTEE 2 years

Powerful Torque

Wrench
Internal Torque Adjustment

Auto Shut-off

ES-B1808L-20
ES-B1812L-20
2.0Ah Li-ion battery

ES-B1808L-40
ES-B1812L-40
ES-B1815L-40
ES-B1822L-40
4.0Ah Li-ion battery
(Long-Lasting Type)

Torque Rings
SUMAKE Color Rings give you an easily visible torque marking system at a glance. Choose the color for each torque level used on your assembly line

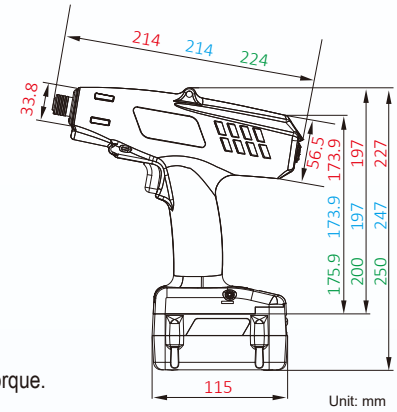

★ With efficient motor increase the productivity.
The performance of ES-B1822L-40 with full charged battery can reach to 6,000 screws on loading 22Nm torque.

BRUSHLESS MOTOR GUARANTEE 1 year

External Torque Adjustment
Adjust The Torque Rapidly

Semi-Auto

ESS-B1805-20
ESS-B1808-20
ESS-B1812-20
2.0Ah Li-ion battery

ESS-B1805-40
ESS-B1808-40
ESS-B1812-40
4.0Ah Li-ion battery
(Long-Lasting Type)



Specification:

Model No.	Voltage (V)	Free Speed (r.p.m)			Torque Range (±10%)			Weight (w/Battery)		Dimension (WxLxH) (mm)	Battery Pack	Bit Type
		High	Mid	Low	ft-lbs (Hard Joint / Soft Joint)	Nm (Hard Joint / Soft Joint)	Kgf/cm (Hard Joint / Soft Joint)	lbs	kg			
Full Auto Shut-Off Type												
ES-B1808L-20	18	1,200	-	780	2.96-5.92	4-8	40-80	2.97	1.35	90x214x227	BP1821L	
ES-B1808L-40					2.96-4.70	4-6.4	40-65.3	3.5	1.6	90x214x247	BP1841L	
ES-B1812L-20	18	720	-	450	3.7~8.88	5-12	50-120	2.97	1.35	90x214x227	BP1821L	
ES-B1812L-40					3.7~7.1	5-9.6	50-97.9	3.5	1.6	90x214x247	BP1841L	
ES-B1815L-40	18	600	-	380	4.4-11.0	6-15	60-150	3.6	1.65	90x224x250	BP1841L	
					4.4-8.9	6-12	60-122.4					
ES-B1822L-40	18	350	-	200	5.92-16.16	8-22	80-220	4.2	1.9	90x224x250	BP1841L	
					5.92-13	8-17.6	80-179.5					
Semi-Auto Type												
ESS-B1805-20	18	2,200	1,600	1,100	1.09-3.7	1.5-5	15-50	2.97	1.35	90x188x232	BP1821L	
ESS-B1805-40					1.09-3.0	1.5-4	15-40.8	3.5	1.6	90x188x252	BP1841L	
ESS-B1808-20	18	1,200	900	600	2.96-5.92	4-8	40-80	2.97	1.35	90x188x232	BP1821L	
ESS-B1808-40					2.96-4.70	4-6.4	40-65.3	3.5	1.6	90x188x252	BP1841L	
ESS-B1812-20	18	700	500	350	4.44-8.88	6-12	60-120	2.97	1.35	90x188x232	BP1821L	
ESS-B1812-40					4.44-7.10	6-9.6	60-97.9	3.5	1.6	90x188x252	BP1841L	

Standard:



Option:
Square Drive 3/8"

Model No. with "A" includes 2 batteries. e.g.ES-B1808LA-20

BRUSHLESS CORDLESS MECHANICAL PULSE SCREWDRIVER (Remote Control Type)

Applications

Ideal tool for precise torque and assembling process management in production line.

SRC-01 *Remote controller*

Remote controller function layout for program /torque setting:

5 unique job model setting with the combination of 6 power output selection multiplied by 99 pulse steps.

TM-M400
Torque Tester, 0-400Nm

TM-M200
Torque Tester, 0-200Nm

TM-M50
Torque Tester, 0-50Nm

Specification:

Model No.	Bit Type	Voltage (V)	Free Speed (r.p.m)	Blow Per Minute (b.p.m)	Torque Range			Bolt Capacity	Overall Length (LxH) (w/o Battery)		Net Weight (w/ Battery)		Battery Pack	Battery Charger
					lbf-in	Nm	Kgf/cm		mm	in	kgs	lbs		
NEW EMS-B1450-30	Hex 6.35 mm	14.4	1,900	2,500	70.9-443	8-50	82-510	M6 (8.8~12.9) M8 (4.6~12.9) M10 (4.6~5.8)	175 x 196	6.89 x 7.72	1.31	2.89	BP1430L	BC16L01
NEW EMW-B1450-30	3/8" Square													
EMS-B1470-30	Hex 6.35 mm	14.4	2,600	3,400	177-620	20-70	204-714	M8 (8.8~12.9) M10 (4.8~8.8) M12 (4.6~5.8)	175 x 196	6.89 x 7.72	1.33	2.93	BP1430L	BC16L01
EMW-B1470-30	3/8" Square													
EMW-B14100-30	3/8" Square	14.4	2,000	2,600	177-885	20-100	204-1020	M10 (4.8~12.9) M12 (6.8~8.8) M14 (4.6~4.8)	175 x 196	6.89 x 7.72	1.35	2.98	BP1430L	BC16L01
EMW-B14100F-30	1/2" Square													
NEW EMW-B14200F-30	1/2" Square	14.4	1,700	2,100	221.3-1770	25-200	255-2040	M12 (4.6~12.9) M14 (4.6~8.8) M16 (4.6~5.8)	219 x 220	8.62 x 8.66	1.83	4.03	BP1430L	BC16L01

Model No.	Measuring Range			Accuracy	Applicable Bolt	Bolt Class	Dimension (WxDxH)(mm)	Power	Accessory	Net Weight (kg)
	kgf-cm	lbf-in	N.m							
TM-M400	0-4079	0-3540	0-400	±10%	M10, M12, M14, M16, M20	12.9	223x200x150	Input 100-240 Vac	M10, M12, M14, M16, M20 Joint	14
NEW TM-M200	0-2039	0-1770	0-200	±10%	M10, M12, M14, M16	12.9	223x200x150	Input 100-240 Vac	M10, M12, M14, M16 Joint	14
TM-M50	0-509	0-442	0-50	±10%	M6, M8, M10	12.9	131x160x130	Input 100-240 Vac	M6, M8, M10 Joint	5

BATTERY & CHARGER (Lithium Ion)

Lithium Ion Battery

- High performance Li-ion battery.
- Built in protection device to prevent battery overcharge and over discharge.
- The latch design increases intensity and convenience.
- Over-temperature protection (discharge): 72˚C

BP0730L
7.2V 3.0Ah(42.5Wh)
Weight : 0.12kg

BP1030L
10.8V 3.0Ah(42.5Wh)
Weight : 0.18kg

BP1430L
14.4V 3.0Ah (42.5Wh)
Weight : 0.33kg

BP1820L
BP1822L
18V 2.0Ah(36Wh)
Weight : 0.49kg

BP1821L
18V 2.0Ah(36Wh)
Weight : 0.43kg

BP1841L
(Long-Lasting type)
18V 4.0Ah(70Wh)
Weight : 0.72kg

Charger

BC08L01
8.4V

BC10L01
12.6V

BC16L01
16.8V

BC21L02
BC21L03
21V

BC21L04
21V











Unit: mm

		BC08L01	BC10L01 / BC16L01	BC21L02 / BC21L03 / BC21L04
● ● ●	Power on(Identification of Original Battery)	1 shut buzz	1 shut buzz	1 shut buzz
☀ ● ●	Charging	x	x	x
☀ ● ●	Charging > 80%	x	x	x
● ● ●	Fully Charged	3 long buzz	3 long buzz	3 long buzz
☀ ● ☀	Incorrect Battery Type or Battery NG	shut buzz continuously	shut buzz continuously	shut buzz continuously

Charger Comparison Sheet

Model No.	Input Voltage	Outout Voltage	Output Current	Charging Time	LCD	Identification Of Original Battery	Warning (Buzz)	Weight (Kg)	Types Of Battery	Features
BC08L01	100-240V	12.6V	3A	Abt. 40mins	x	●	●	0.43	■	• SUMAKE battery chargers are compact size, light weight, quick recharge and wide voltage range 90~240V can be applicable worldwide. • Battery temperature detector and protection. • ID identification only allows the SUMAKE charger to charge to ensure battery safety and extend battery life.
BC10L01	100-240V	12.6V	3A	Abt. 40mins	x	●	●	0.47	■	
BC16L01	100-240V	16.8V	3A	Abt. 40mins	x	●	●	0.46	■	
BC21L02	100-240V	21V	3A	1.95Ah: Abt. 40mins 3.9Ah: Abt. 80mins	x	x	x	0.53	■ ■	
BC21L03	100-240V	21V	3A	1.95Ah: Abt. 40mins 3.9Ah: Abt. 80mins	x	●	●	0.55	■ ■	
BC21L04	100-240V	21V	3A	2.0Ah: Abt. 40mins	x	●	●	0.53	■	

★A for UL plug / B for Europe plug / C for UK plug / D for Aus / E for India / F for China / G for Brasil / J for PSE(Japan)

SUMAKE®

SUMAKE Industrial Co., Ltd.
4F, NO.351, Yangguang St., Neihu District, Taipei, Taiwan
Tel: 886-2-2659-3500
Fax: 886-2-2659-3700
http://www.sumake.com
http://www.aircompressors.com.tw
e-mail: sales@sumake.com.tw

2201

©SUMAKE We reserve the right to make changes without prior notice.

CATA-ETC22-K